



TELEDYNE LECROY
Everywhere you look™



**Operator's
Manual**
TekProbe®
Probe Adapter



TELEDYNE LECROY
Everywhereyoulook™

TPA10 TekProbe Probe Adapter Operator's Manual

© 2015 Teledyne LeCroy, Inc. All rights reserved.

Unauthorized duplication of Teledyne LeCroy documentation materials other than for internal sales and distribution purposes is strictly prohibited. However, clients are encouraged to duplicate and distribute Teledyne LeCroy documentation for their own internal educational purposes.

Teledyne LeCroy is a trademark of Teledyne LeCroy, Inc. Other product or brand names are trademarks or requested trademarks of their respective holders. Information in this publication supersedes all earlier versions. Specifications are subject to change without notice.

925568-00
July, 2015

Contents

Safety	2
Cleaning	2
About the TPA10	3
Electrical Characteristics	3
Environmental Characteristics	3
Physical Characteristics	3
Supported Probes	3
Connection	4
Probe Settings	4
Returning a Product for Service	5
Contact Us	6
Warranty	7
Certifications	8
EMC Compliance	8
Safety Compliance	9
Environmental Compliance	9

Safety

Observe these instructions to keep the product operating in a correct and safe condition. Follow generally accepted safety procedures in addition to the precautions specified in this section. **The overall safety of any system incorporating this product is the responsibility of the assembler of the system.**

Symbols

These symbols appear on the product or in its documentation to alert you to important safety considerations.



CAUTION of potential damage to product, or **WARNING** of potential bodily injury. Attend to the accompanying information to protect against injury or damage. Do not proceed until conditions are fully understood and met.

Precautions

Use only as intended. The product is intended to be used only with the compatible Teledyne LeCroy instruments. Using the product and/or the equipment it is connected to in a manner other than specified may impair the protection mechanisms.

Do not apply a voltage to any input that exceeds the maximum rating of that input. Refer to the body of the oscilloscope and the product page at teledynelecroy.com for detailed information.

Use indoors only. The accessory is intended for indoor use and should be operated in a clean, dry, environment. Do not use in wet/damp or explosive atmospheres.

Keep product surfaces clean and dry. See "Cleaning" for instructions.

Do not operate with suspected failures. Do not use the product if any part is damaged. Refer all maintenance to qualified service personnel.

Cleaning

Clean only the exterior of the product using a soft cloth moistened with water or an alcohol solution. Do not use harsh chemicals or abrasive elements. Under no circumstances submerge the device or allow moisture to penetrate it.

About the TPA10

The TPA10 TekProbe® Probe Adapter enables you to connect select TekProbe interface level II probes to any ProBus-equipped Teledyne LeCroy instrument. The TPA10 supplies all necessary power and offset control to the probe and automatically detects which probe is attached.

Electrical Characteristics

Bandwidth:	4 GHz (adapter only)
Power Supplies:	+15V, -15V, +5V, -5V (each 2%)
Offset Voltage:	+/-1V (1%)
Max Input Voltage:	47 Vpk, 33 Vrms

Environmental Characteristics

Operating Temperature:	0 to 50 °C
Non-operating Temperature:	-40 to +70 °C
Humidity:	5% to 95% RH from 10 to 40 °C 5% to 75% RH above 40 °C RH not controlled below 10 °C
Operating Altitude:	3000 meters maximum

Physical Characteristics

Dimensions:	39.0 mm W x 31.1 mm H x 88.6 mm D
Weight:	119 g

Supported Probes

The following TekProbe devices are supported for use with TPA10:

Preamplifiers

ADA400A, 1 MHz differential preamplifier

Current Probes

TCP202/TCP202A, 50 MHz AC/DC current probe

Single-ended Active Probes

P6205, 750 MHz single-ended active probe

P6243, 1 GHz single-ended active probe

P6245, 1.5 GHz single-ended active probe

P6241, 4 GHz single-ended active probe

P6249, 4 GHz single-ended active probe

TPA10 TekProbe Probe Adapter

Differential Active Probes

P5205/P5205A, 100 MHz differential probe

P5210/P5210A, 50 MHz differential probe

P6246, 400 MHz differential probe

P6247, 1 GHz differential probe

P6248, 1.5 GHz differential probe

P6250, 500 MHz differential probe

P6251, 1 GHz differential probe

Connection


Connect the TPA10 adapter to one of the oscilloscope's ProBus inputs. Connect the probe to the TekProbe input on the TPA10. It does not matter in what order this is done.

Probe Settings

Once the probe is connected to the oscilloscope through the TPA10, the oscilloscope will automatically recognize it and set the attenuation accordingly. If the probe contains internal offset circuitry, it is used to control the probe offset. Other probes use the instrument offset capability applied to the input; adjust the Offset setting on the Cx setup dialog.

Buttons and switches on probes can continue to be used as described in the probe manual. Any control that changes the probe attenuation will be sensed by the oscilloscope and the channel scale adjusted accordingly.

The TPA10 dialog appears behind the setup dialog for the channel to which the probe is connected. With probes that store specific information about themselves in an eeprom, the tab shows "T-<probe model>"; otherwise, it shows "T-Probe".

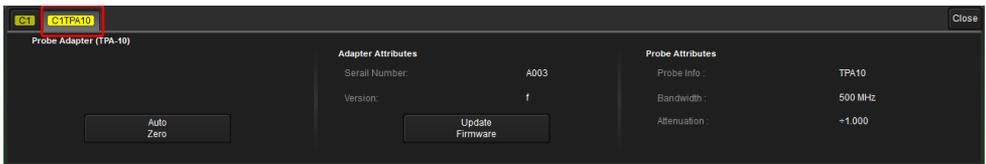

The remainder of the dialog displays the probe attributes and contains controls enabling you to:

- Auto Zero probes
- Update the TPA10 firmware

NOTE: The Update Firmware button appears only if the oscilloscope senses the TPA10 firmware is out of date and can support the update (not all models can).

Returning a Product for Service

Contact your regional Teledyne LeCroy service center for calibration or other service. If the product cannot be serviced on location, the service center will give you a **Return Material Authorization (RMA) code** and instruct you where to ship the product. All products returned to the factory must have an RMA.

Return shipments must be prepaid. Teledyne LeCroy cannot accept COD or Collect shipments. We recommend air-freighting. Insure the item you're returning for at least the replacement cost.

1. Remove all accessories from the device.
2. Pack the product in its case, surrounded by the original packing material (or equivalent). Do not include the manual.
3. Label the case with a tag containing:
 - The RMA
 - Name and address of the owner
 - Product model and serial number
 - Description of failure or requisite service
4. Pack the product case in a cardboard shipping box with adequate padding to avoid damage in transit.
5. Mark the outside of the box with the shipping address given to you by Teledyne LeCroy; be sure to add the following:
 - ATTN: <RMA code assigned by Teledyne LeCroy>
 - FRAGILE
6. **If returning a product to a different country:**
 - Mark the shipment as a "Return of US manufactured goods for warranty repair/recalibration."
 - If there is a cost for the service, list the cost in the Value column and the original purchase price "For insurance purposes only."
 - Be very specific about the reason for shipment. Duties may have to be paid on the value of the service.

Extended warranty, calibration, and upgrade plans are available for purchase. Contact your Teledyne LeCroy sales representative.

Contact Us

Our regional service centers are:

World Wide Corporate Office

Teledyne LeCroy
700 Chestnut Ridge Road
Chestnut Ridge, NY, 10977, USA
teledynelecroy.com
Sales and Service:
Ph: 800-553-2769 / 845-425-2000
FAX: 845-578-5985
contact.corp@teledynelecroy.com
Support:
Ph: 800-553-2769
support@teledynelecroy.com

US Protocol Solutions Group

Teledyne LeCroy
3385 Scott Boulevard
Santa Clara, CA, 95054, USA
teledynelecroy.com
Sales and Service:
Ph: 800-909-7211 / 408-727-6600
FAX: 408-727-0800
protocolsales@teledynelecroy.com
Support:
Ph: 800-909-7112 / 408-653-1260
psgsupport@teledynelecroy.com

European Headquarters

Teledyne LeCroy SA
4, Rue Moïse Marcinihes
Case postale 341
1217 Meyrin 1
Geneva, Switzerland
teledynelecroy.com/europe
Ph: + 41 22 719 2111
FAX: + 41 22 719 2230
contact.sa@teledynelecroy.com

China

LeCroy Corporation Beijing
Rm. 2001, Unit A, Horizon Plaza
No. 6, Zhichun Road, Haidian Dist.
Beijing 100088, China
www.lecroy.com.cn
Sales:
Ph: 86-10-82800318/0319/0320
FAX: 86-10-82800316
Marketing.China@teledynelecroy.com
Service:
Rm. 2002
Ph: 86-10-82800245
Service.China@teledynelecroy.com

Korea

Teledyne LeCroy Korea
10th fl. 333 Yeongdong-daero
Gangnam-gu
Seoul 135-280, Korea
teledynelecroy.com/korea
Ph: ++ 82 2 3452 0400
FAX: ++ 82 2 3452 0490

Japan

Teledyne LeCroy Japan
3F, Houbunshafuchu Bldg.
3-11-5, Midori-cho, Fuchu-Shi
Tokyo 183-0006, Japan
teledynelecroy.com/japan
Ph: + 81-42-402-9400
FAX: + 81-42-402-9586

For a complete list of offices by country, including our sales & distribution partners, visit:

teledynelecroy.com/support/contact

Warranty

THE WARRANTY BELOW REPLACES ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS, OR ADEQUACY FOR ANY PARTICULAR PURPOSE OR USE. TELEDYNE LECROY SHALL NOT BE LIABLE FOR ANY SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, WHETHER IN CONTRACT OR OTHERWISE. THE CUSTOMER IS RESPONSIBLE FOR THE TRANSPORTATION AND INSURANCE CHARGES FOR THE RETURN OF PRODUCTS TO THE SERVICE FACILITY. TELEDYNE LECROY WILL RETURN ALL PRODUCTS UNDER WARRANTY WITH TRANSPORT PREPAID.

The product is warranted for normal use and operation, within specifications, for a period of one year from shipment. Teledyne LeCroy will either repair or, at our option, replace any product returned to one of our authorized service centers within this period. However, in order to do this we must first examine the product and find that it is defective due to workmanship or materials and not due to misuse, neglect, accident, or abnormal conditions or operation.

Teledyne LeCroy shall not be responsible for any defect, damage, or failure caused by any of the following: a) attempted repairs or installations by personnel other than Teledyne LeCroy representatives, b) improper connection to incompatible equipment, or c) use of non-Teledyne LeCroy supplies. Furthermore, Teledyne LeCroy shall not be obligated to service a product that has been modified or integrated where the modification or integration increases the task duration or difficulty of servicing the product. Spare and replacement parts and repairs all have a 90-day warranty.

Products not made by Teledyne LeCroy are covered solely by the warranty of the original equipment manufacturer.

Certifications

EMC Compliance

EC Declaration of Conformity - EMC

The product meets the intent of EC Directive 2004/108/EC for Electromagnetic Compatibility. Compliance was demonstrated to the following specifications as listed in the Official Journal of the European Communities:

EN 61326-1:2013, EMC requirements for electrical equipment for measurement, control, and laboratory use.^{1, 2, 3}

1 This product is intended for use in nonresidential areas only. Use in residential areas may cause electromagnetic interference.

2 Emissions exceeding the levels required by this standard may occur when product is connected to a test object.

3 To ensure compliance with the applicable EMC standards, use high quality shielded interface cables.

EUROPEAN CONTACT:*

Teledyne LeCroy Europe GmbH
Im Breitspiel 11c
D-69126 Heidelberg
Germany
Tel: + 49 6221 82700

Australia & New Zealand Declaration of Conformity - EMC

The product complies with the EMC provision of the Radio Communications Act per the following standards, in accordance with requirements imposed by Australian Communication and Media Authority (ACMA):

AS/NZS CISPR 11:2011 Radiated and Conducted Emissions, Group 1, Class A.

AUSTRALIA / NEW ZEALAND CONTACTS:*

RS Components Pty Ltd.
Suite 326 The Parade West
Kent Town, South Australia 5067

RS Components Ltd.
Unit 30 & 31 Warehouse World
761 Great South Road
Penrose, Auckland, New Zealand

* Visit teledynelecroy.com/support/contact for the latest contact information.

Safety Compliance

EC Declaration of Conformity - Low Voltage

The product meets the intent of EC Directive 2006/95/EC for Product Safety. Compliance was demonstrated to the following specifications as listed in the Official Journal of the European Communities:

IEC/EN 61010-031:2015 Safety requirements for electrical equipment for measurement, control, and laboratory use – Part 031: Safety requirements for hand-held probe assemblies for electrical measurement and test.

Environmental Compliance

End-of-Life Handling



The product is marked with this symbol to indicate that it complies with the applicable European Union requirements to Directives 2002/96/EC and 2006/66/EC on Waste Electrical and Electronic Equipment (WEEE) and Batteries.

 The product is subject to disposal and recycling regulations that vary by country and region. Many countries prohibit the disposal of waste electronic equipment in standard waste receptacles. For more information about proper disposal and recycling of your Teledyne LeCroy product, please visit teledynelecroy.com/recycle.

Restriction of Hazardous Substances (RoHS)

The product and its accessories conform to the 2011/65/EU RoHS2 Directive, as they have been classified as Industrial Monitoring and Control Equipment (per Article 3, Paragraph 24) and are exempt from RoHS compliance until 22 July 2017 (per Article 4, Paragraph 3).

925568-00
July, 2015



700 Chestnut Ridge Road
Chestnut Ridge, NY 10977
USA

teledynelecroy.com